

SEA4K-M156RM-P

15.6" IS UHD 4K Tactile Capacitive Touchscreen



KEY FEATURES

- 15.6" Display with 4K UHD (3840 x 2160) native resolution
- Compliant MIL-STD 810G/ MIL-STD 461E
- Rack mount mechanical design, supports VESA mount
- PCAP multi-touch screen
- Military-grade power connector (MIL-DTL-38999/1)
- AC 100~240V, Universal, ±10%; DC 9~36V, ±10% (Optional)
- Convenient on-screen display controls




SPECIFICATIONS

Display			
Touch / Glass	Projected Capacitive Multi Touch Screen PCAP with With ITO Flim (Optional)	Resolution	3840 x 2160
Size	15.6 inches	Contrast Ratio	1000:1
Panel Brightness	500 nits	Display Color	1073.7M Colors
View Angles	178°/178°/178°/178°	Active Area	344.217 x 193.762 mm
Environment			
Operating Humidity	10% to 95% RH	Operating Temperature	-40°C to 70°C
Storage Temperature	-40°C to 70°C		
Compliance			
MIL-STD 461E/F	RE101 / RE102 CE101 / CE 101 with EMI Glass / Touch(Optional) RS101 / RS 103 CS101 / CS 106 / CS 109 / CS 114 / CS 115 / CS FF1	MIL-STD 810F/G	Vibration Method 514.5 Humidity Method 507.4 Transit Drop Method 516.5
Certification			
Certification	CE, FCC		
IO Ports			
USB Port	1 x USB for Touch Screen (Optional)	Serial Port	1 x RS232 for Remote Control (Optional)
Video	1 x VGA 1 x DVI 1 x Display Port 1.2 1 x HDMI 1.4 (Optional) 1 x HDMI 2.0 (Optional)	Audio	1 x Audio Line In
Mechanical			
Dimension	457.6 x 287.7 x 68.8 mm	Mounting	VESA Mount/ Rack Mount
Enclosure	Aluminum	Cooling System	Fanless Design
Accessory			
Accessory	1 x User Manual(Hardcopy) 1 x Power Cord MILDTL38999/1 1 x VGA Cable		

- 1 x ÖX Cable
- 2 x PÖT Cable
- 1 x ÖÜ Cable
- 1 x Öuido &æà

Power	
Power Rating	AC 100~240V, Universal, ±10% DC 9~36V, ±10% ÇU []æD
Control	
Button	7 key: Ü [, ^] Ö^&!^æ•^ Q}&!^æ•^ Exit/ Auto T^ } Day/ Night Lock/ Unlock

DIMENSIONS WpÖVKT T

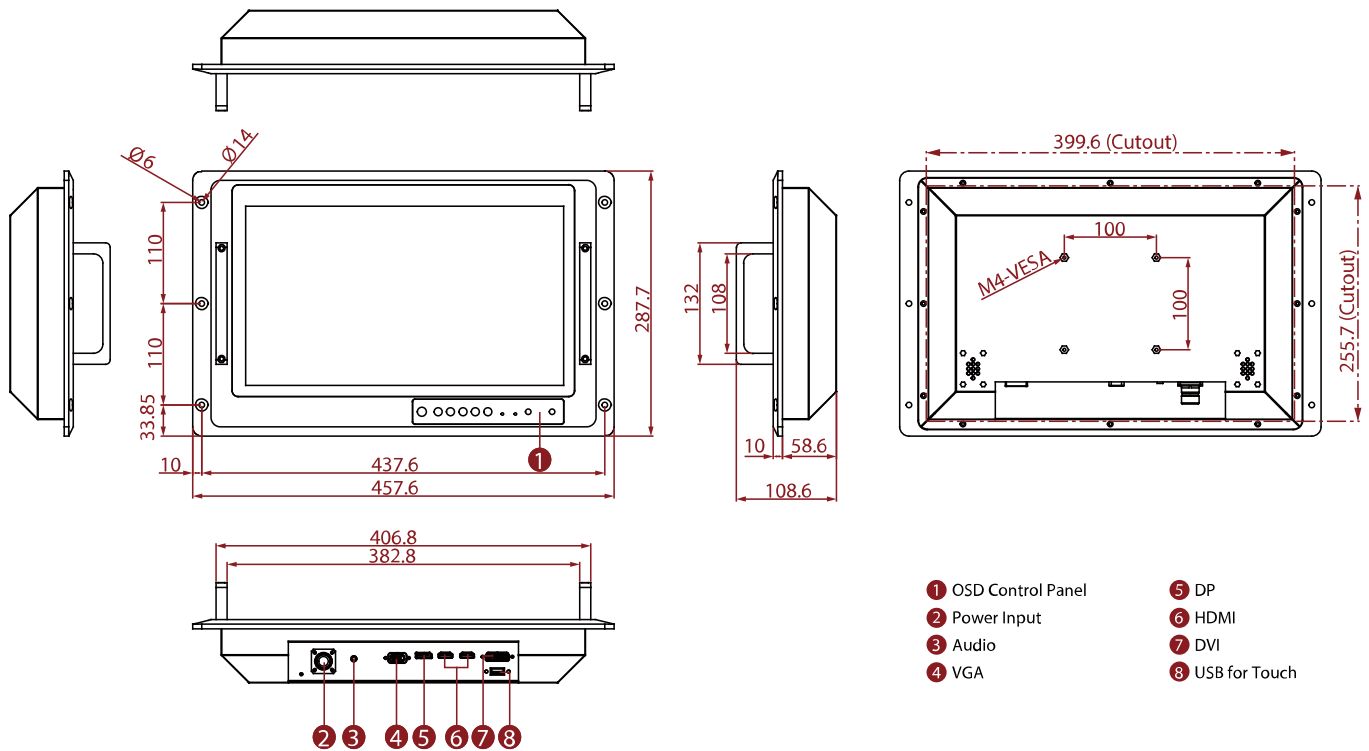

NOTE

- 1 This is a simplified drawing and some components are not marked in detail.
- 2 If you require an external test report, Seatronx will charge an NRE fee.
- 3 Please contact our sales representative if you need further product information.
- 4 All specifications are subject to change without prior notice.
- 5 The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Seatronx Sales Team for more information.