



Product Data

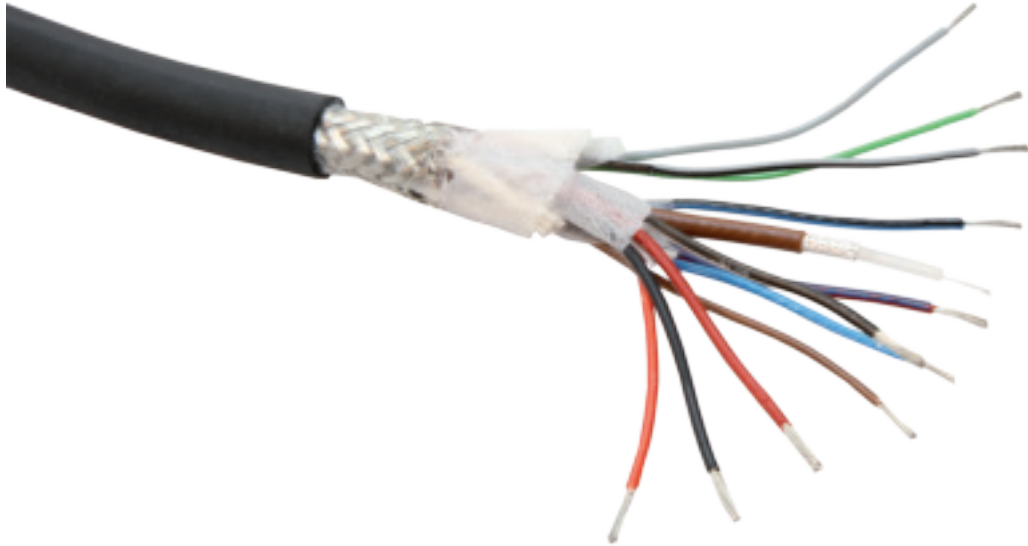

Cable section

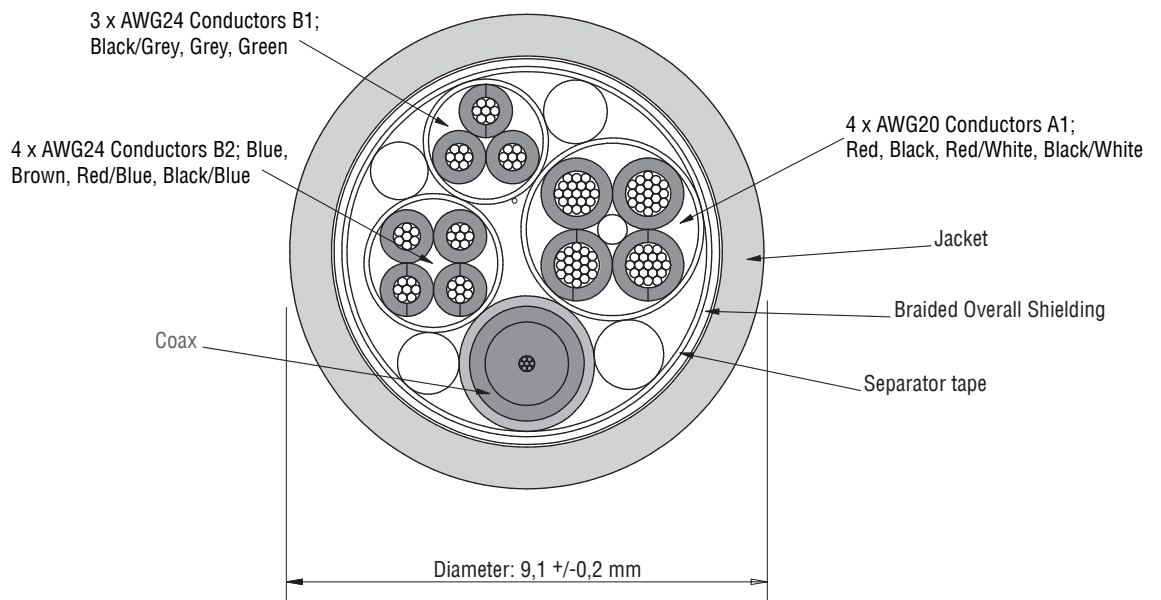

TECHNICAL DATA

Cable Base 9B-1CB11W

	Description
Article number	1221300
Coax	75 Ohm RG179, 7 x 0,10mm, silver plated copper, Shield: braided 85%, silver plated copper, sheathing: TPE, brown.
Conductor A1	4 x AWG20, tin plated copper, 19 x 0,203mm, Color: Red, Black, Red/White, Black/White.
Conductor B1	3 x AWG24, tin plated copper, 19 x 0,13mm, Color: Green, Grey, Black/Grey.
Conductor B2	4 x AWG24, tin plated copper, 19 x 0,13mm, Color: Blue, Brown, Red/Blue, Black/Blue.
Shielding	Braided, tin plated copper. coverage 85%.
Jacket	PE, overall diameter 9,1 +/-0,2mm, colour: RAL 9002 Black, flame resistant, halogen free.
Temperature range	-40°...+90°C.
Bending radius	2 x Diameter, fixed installation.
Ex applications	This cable is used in an Ex-application; so no changes may be made to the cable or this datasheet. Any changes made in this documentation must be approved by the "Ex" responsible person.
Notes	This Cable Base 9B-1CB11W is compliant to RoHS and REACH directive.

All data subject to change without notice. All dimensions are for commercial purpose only.
The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.
All products are manufactured in accordance with the ISO 9001 quality management system, ISO/TS 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.

